


# 7000 series




## Double Hung & Single Hung

- 3 1/4" welded frame with sloped sill for run-off
- Fully welded aluminum reinforced sashes
- Extruded sill receiver for added sash stability
- Easy open lift rails for smooth operation
- Tilt-Sash for quick maintenance & cleaning
- Upgradeable Glass & WOCD mechanism
- Durable composite lock system for longevity
- Double lock on 28" width and up
- Standard DP-50 on all units up to 40"x 72"
- 3/4" insulated energy efficient glass
- Half Screen standard (Full screen optional)




Single Hung



Double Hung

*\*Full Screen required for Black & Bronze\**

Double & Single Hung windows are designed for optimal airflow and ease of cleaning. The tilt-in design is among the most popular style of windows due to its simplistic but beautiful design.



White



Beige



Clay



Black  
White  
Interior



Bronze  
White  
Interior

### Double Hung Energy Ratings:

Glass Package	Without Grid		With Grid	
	U-Value	SHGC	U-Value	SHGC
Premium (standard)	0.28	0.37	0.28	0.33
Advanced (optional)	0.27	0.35	0.28	0.31
Advanced Max (optional)	0.23	0.25	0.23	0.23

Values Shown:

Without Grid

With Grid

### Single Hung Energy Ratings:

Glass Package	Without Grid		With Grid	
	U-Value	SHGC	U-Value	SHGC
Premium (standard)	0.28	0.38	0.28	0.34
Advanced (optional)	0.27	0.35	0.27	0.32
Advanced Max (optional)	0.22	0.25	0.23	0.23

Values Shown:


Without Grid

With Grid

# 7000 series



## Double Hung & Single Hung

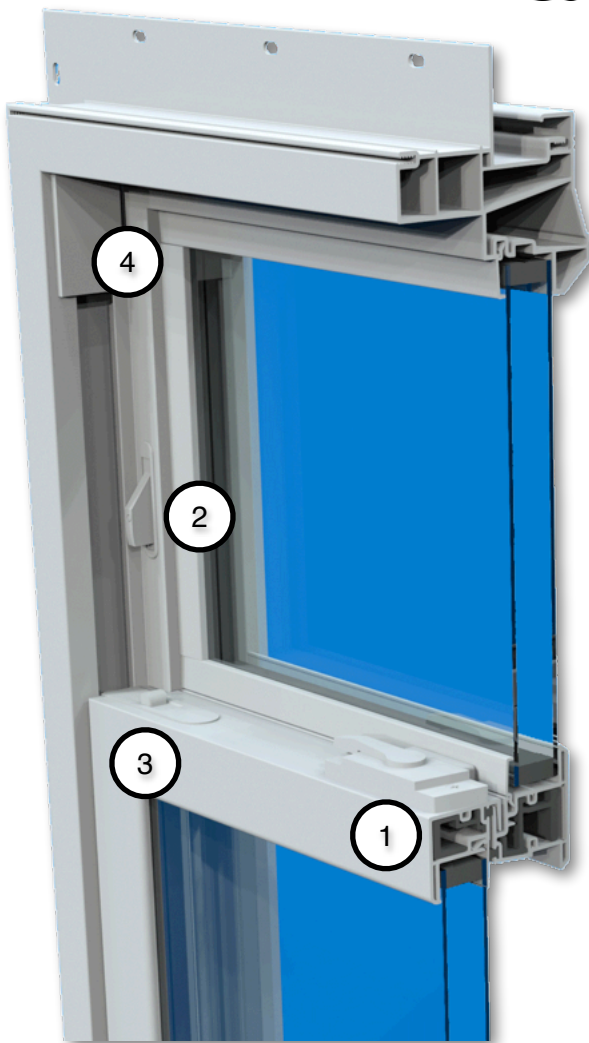

1) Durable Composite lock system that resists rust, fading, and cracking under extreme conditions


2) Vent latches standard on all hung windows with upgradeable WOCD latches

3) Tilt in, Maintenance free and easy cleaning sashes - *Single hung top sashes are stationary and will not tilt*

4) Block & Tackle balance system for easy operation and better EGRESS results

**WIDTH**  
MIN 12"  
MAX 48"

**HEIGHT**  
MIN 20"  
MAX 77"

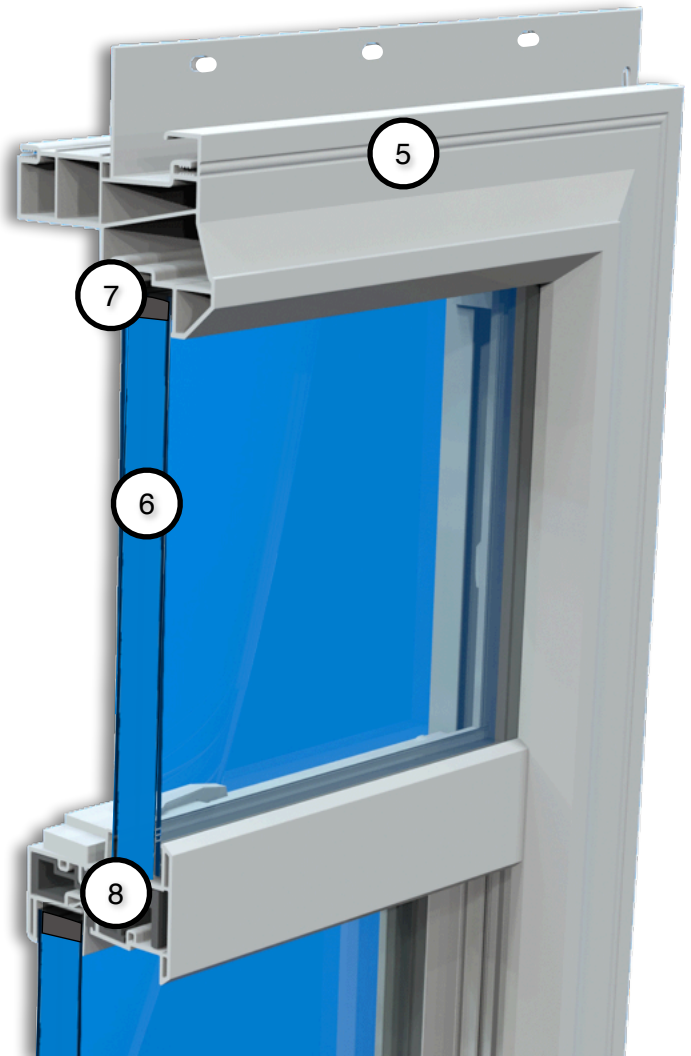

5) Standard Brickmold exterior

6) 3/4" insulated glass with a seamless duralite spacer

7) Sturdy 3 1/4" thick frame jamb

8) Full coverage of Weather-stripping around the perimeter of the sash - Interlock gaskets for best possible seal

